


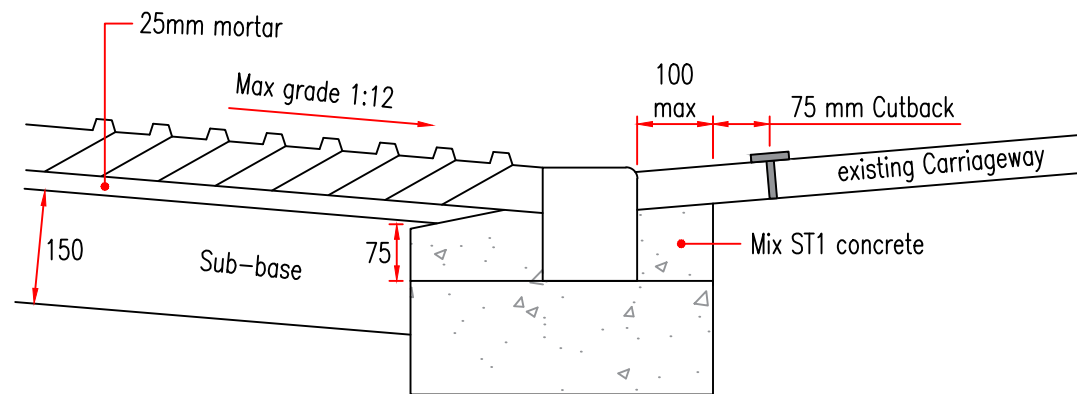

NOTES

1. Tactile paving to be 400 x 400 x 50mm thick laid on 25mm Class 1 mortar on 150mm ST1 concrete on primary/secondary road and, Type 1 sub-base on tertiary/shared surface road.
2. Red paving to be used at controlled crossings. Buff or contrasting colour other than red to be used at uncontrolled crossings.
3. Kerb face to be 6mm; No greater than 12mm.
4. Tactile paving to be laid such that the domes are in line with the direction of pedestrian travel.
5. Tactile crossing width to be 2m minimum.
6. Gullies are not to be within the crossing area and need to be positioned upstream.

REV.	DESCRIPTION	CHECKED	DATE

INIT.	DATE	PROJECT TITLE	
ORIGINATOR	RY 07/2024	STANDARD CONSTRUCTION DETAILS	
CHECKER	SH 07/2024	SCALE	DATE
DESIGNER	RY 07/2024	N.T.S.	JUL. 2024
REVIEWER	TK 07/2024	DRAWING No. DM-1100-19	