


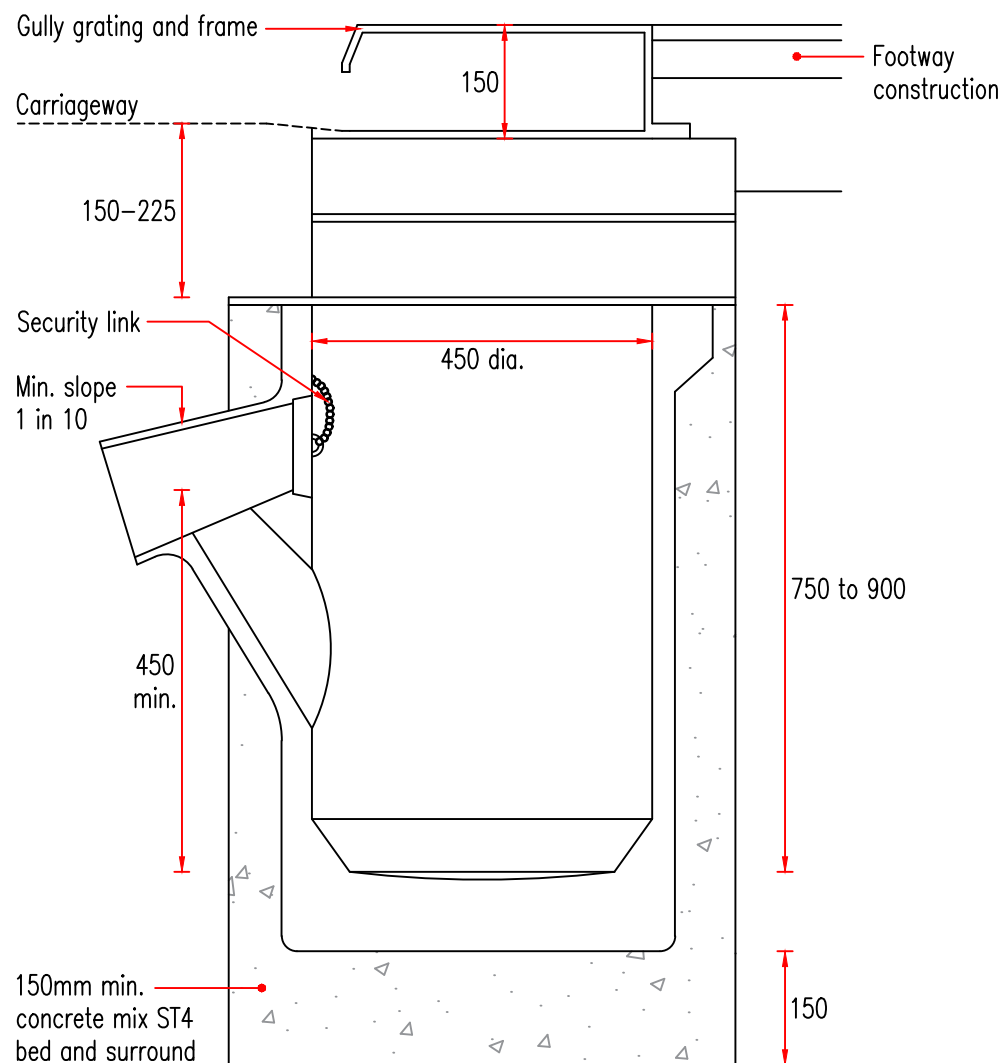

NOTES

Gully

1. The minimum depth from the top of the grating to the top of the gully outlet is to be 750mm, cover to outlet required when under carriageway.
2. Depth of gully pot to be 900mm in primary and secondary roads and, 750 mm in tertiary and shared surface roads.

Grating and Frame

3. To be D400 double triangular or hinged as required by the SCC.
4. Gully frame to be set 5-10mm below carriageway surface.
5. Precast concrete riser units are to be used. Reinstatement to be proprietary mastic asphalt or HRA as agreed with SCC.
6. Rodding eye to have stopper and chain installed.

DRAWING TITLE

DRAINAGE AND SERVICE DUCTS
PRECAST GULLY WITH SIDE ENTRY

REV.	DESCRIPTION	CHECKED	DATE
A	MINOR CHANGES IN NOTES	CB	10/2025

ORIGINATOR	INIT.	DATE	PROJECT TITLE
RY	RY	08/2024	STANDARD CONSTRUCTION DETAILS
CHECKER	SH	08/2024	SCALE
RY	RY	08/2024	N.T.S.
DESIGNER	TK	08/2024	DATE
TK	TK	08/2024	AUG. 2024
REVIEWER	DM-500-04A		DRAWING No.
			DM-500-04A