


NOTES

1. These details are for kerbing laid in conjunction with new carriageway construction including haunching.
2. Concrete bed to be mechanically vibrated and the surface roughened to provide a key for backing.
3. The backing concrete must be placed within one hour of laying the concrete bed. All concrete to be Mix ST4.
4. Kerb face heights to be as specified in Design Manual.
5. Kerbs laid to smooth horizontal and vertical alignment.
6. Where paviors are to be laid adjacent to the kerbs, the kerbs and channel backing shall be adjusted accordingly.

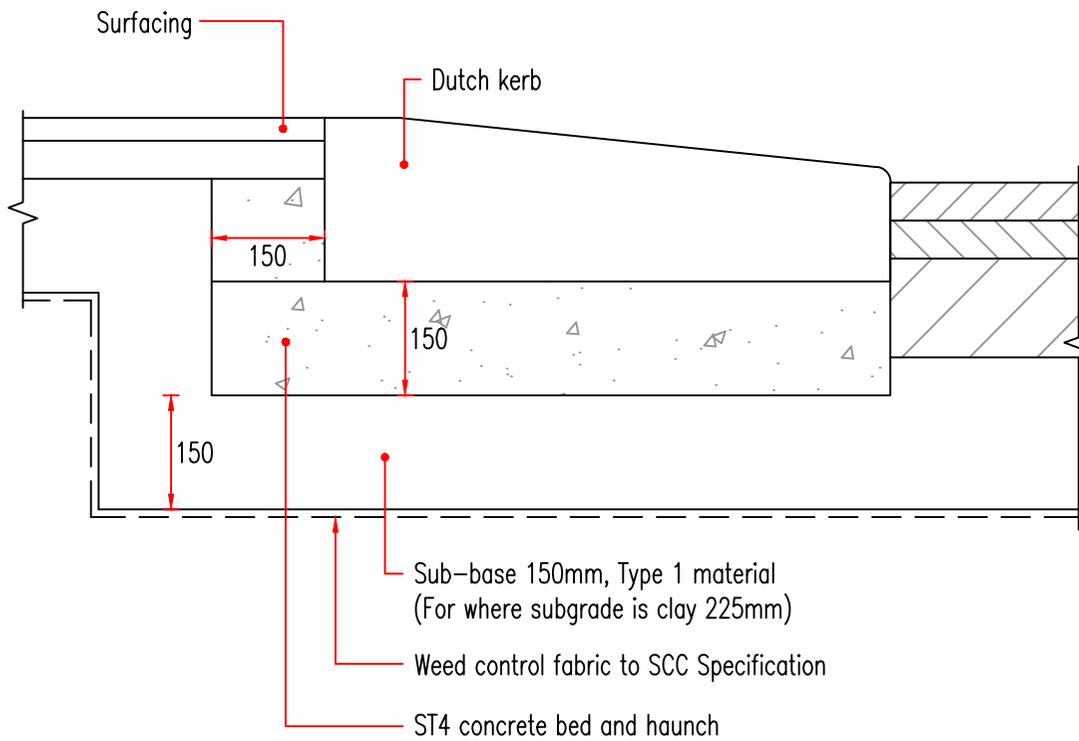

Growth, Highways & Infrastructure  
Suffolk County Council  
Endeavour House  
8 Russell Road  
Ipswich  
Suffolk IP1 2BX

**DRAWING TITLE**  
KERBS, FOOTWAYS, CYCLEWAYS AND PAVED AREAS  
KERBING  
DUTCH KERB LAID IN TRENCH

REV.	DESCRIPTION	CHECKED	DATE

	INIT.	DATE	PROJECT TITLE	
ORIGINATOR	RY	07/2024	STANDARD CONSTRUCTION DETAILS	
CHECKER	SH	07/2024	SCALE	DATE
DESIGNER	RY	07/2024	N.T.S.	JUL. 2024
REVIEWER	TK	07/2024	DRAWING No. DM-1100-08	