


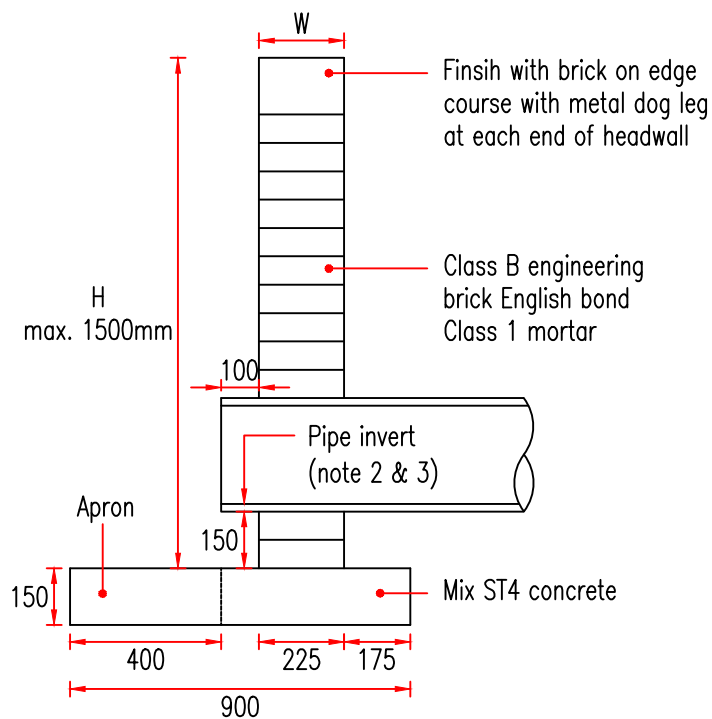

SECTION

NOTES

1. Dimensions H and W as shown on Scheme drawings. Side slopes to ditches to be no greater than existing gradient.
2. The first pipe joint shall be flexible and located not more than 300mm from the back of the headwall.
3. Where the ditch outfalls into the pipe the invert of the pipe shall be level with the top of the apron.

DRAWING TITLE

DRAINAGE AND SERVICE DUCTS
BRICK HEADWALL

REV.	DESCRIPTION	CHECKED	DATE
A	MINOR CHANGES IN NOTES	CB	11/2025

INIT.	DATE	PROJECT TITLE	
ORIGINATOR	RY	08/2024	STANDARD CONSTRUCTION DETAILS
CHECKER	SH	08/2024	SCALE
DESIGNER	RY	08/2024	N.T.S.
REVIEWER	TK	08/2024	DATE
			AUG. 2024
			DRAWING No.
			DM-500-14A