




CONSENT REQUIRED

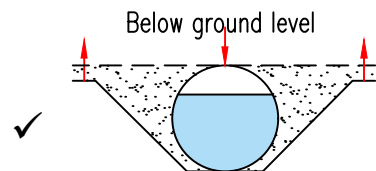


Pipe Culvert (including extension and removal of) – Consent required under Section 23 (1)(b).

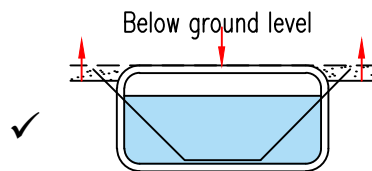


Oversized Box Culvert (including extension and removal of) – Consent required under Section 23 (1)(b).

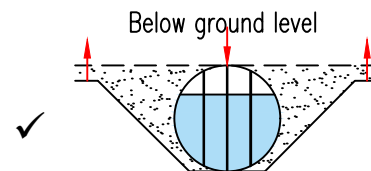


Trash Screens – Consent required as it is an alteration to a culvert and has the potential to obstruct flow under Section 23 (1)(c).




Weir, Dam, Impoundment or Temporary Works That Obstruct Flow – Consent required under Section 23 (1)(a).



Pipe Crossing (in channel) – Consent required under Section 23 (1)(a) if placed on bed and under Section 23 (1)(b) if above bed.




Bridge (abutments restricting flow) – Consent required under Section 23 (1)(b) as it acts like a culvert.




Bridge (where soffit level is below bank top level) – Consent required under Section 23 (1)(b) as it acts like a culvert.


CONSENT NOT REQUIRED




Utilities Crossing (min. 1.5m below bed) – Consent not required under LDA 91 as it does not affect the watercourse potential temporary works consent.




Protruding Pipe Outfall – Consent not required under LDA 91 as it will not act like a dam/weir or like obstruction.




Bank Protection Works – Consent not required under LDA 91, (temporary works may require consent).



Bridge (abutments not reducing flow area/width) – Consent not required under LDA 91 as it does not interfere with flow.



Utilities Crossing (above bank) – Consent not required under LDA 91 as it does not affect the watercourse.



Clear span bridge – Consent not required as it does not affect the watercourse.

NOTES

- Any Utilities below the bed of a watercourse must include a strike plate or be marked on both sides of the watercourse bank.
- Any temporary works such as sandbags/ scaffoldings and dams etc. Where an item is placed in the watercourse for damming or diverting will require consent.
- Consent status:
✓ Consent required.
✗ Consent not required.

REV.	DESCRIPTION	CHECKED	DATE

INIT.	DATE	PROJECT TITLE
ORIGINATOR	RY 08/2026	STANDARD CONSTRUCTION DETAILS
CHECKER	JS 08/2026	SCALE
DESIGNER	RY 08/2026	N.T.S.
REVIEWER	JS 08/2026	DATE
		OCT. 2026
		DRAWING No.
		DM-500-26