

SUFFOLK COUNTY COUNCIL

Revisions

Date

Int.

No.

Rev.

New Issue

03/04

J.G.

B

A

Title Block Amended

TITLE

SERVICE DUCTS

Drawn

WS

Ch'd.

Ex'd.

App'd.

Scale

N.T.S.




Date

5/02

Dwg. No.

7/106B

Director of Environment & Transport

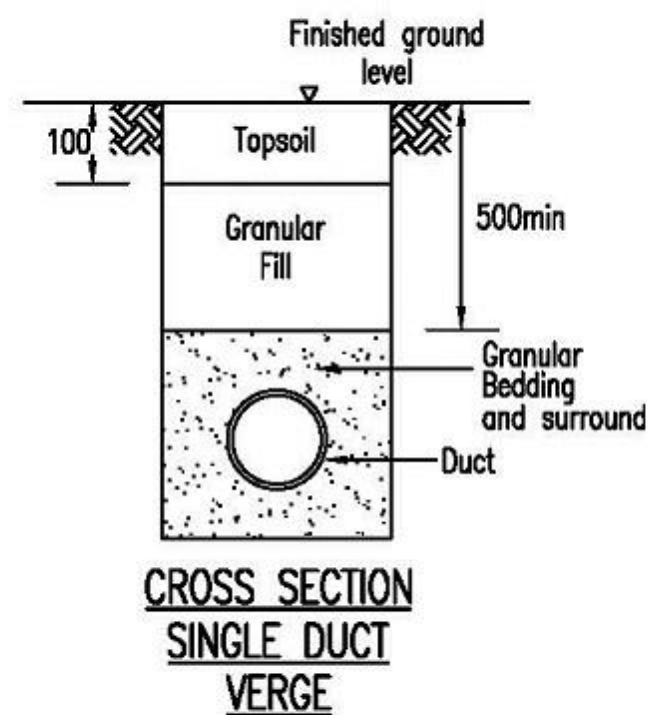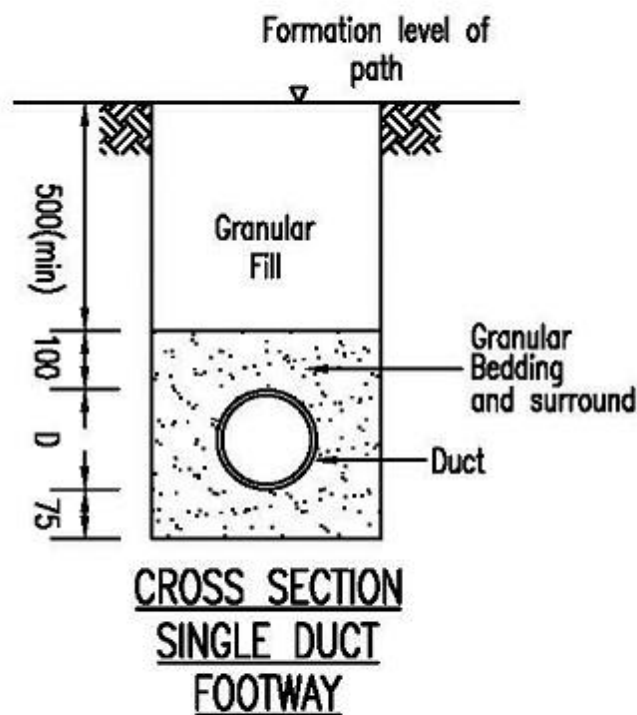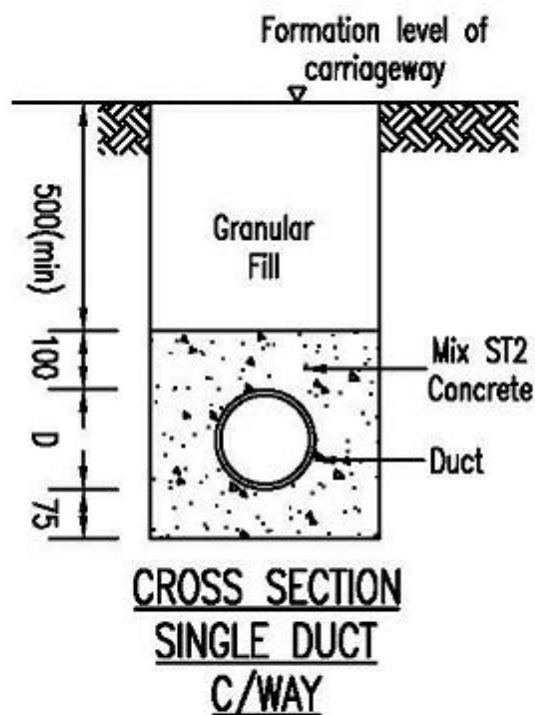

NOTES

1. Granular Fill to Clause 7.7 compacted in 150mm layers.
2. Concrete to be mechanically vibrated and left for 48hrs before backfill.
3. Ducts to comply with Clause 7.16.
4. **Markers**
Kerbed Carriageway Duct position to be marked by a V-notch cut in the top or bottom face of the kerb vertically above the duct.
Unkerbed Carriageway Duct position to be marked by a concrete slab 450x450x50 thick, set flush in the verge in line with the duct with an eye bolt in base of the slab for fastening draw rope to.
5. During construction the draw rope is to be secured to yellow coloured wooden marker posts and the ends of the ducts temporarily stopped to prevent ingress of material.