



Building or fenceline

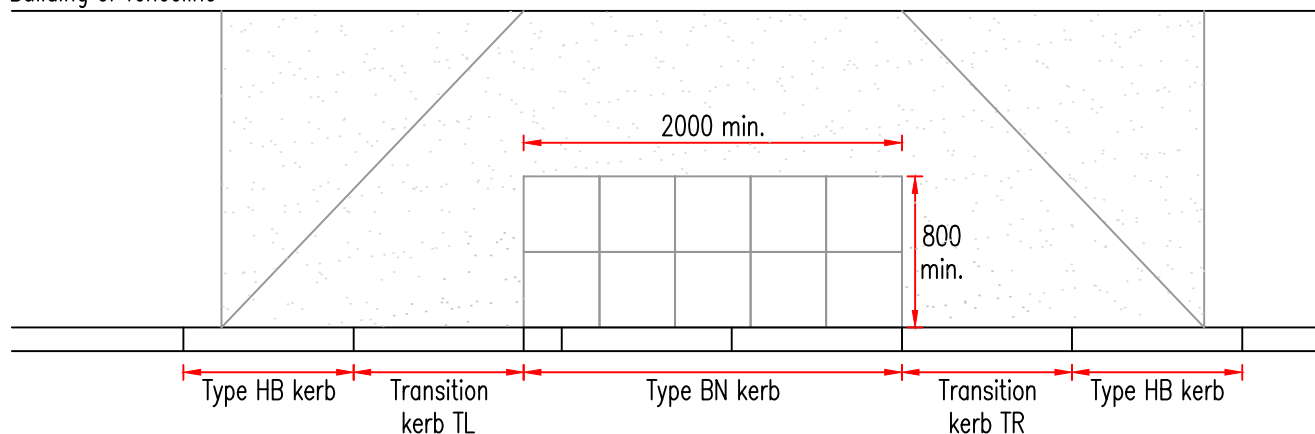

Carriageway

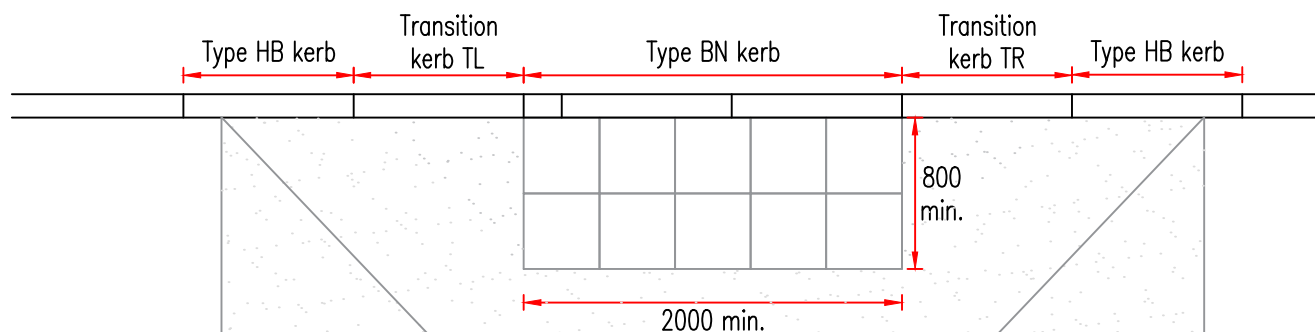

Building or fenceline

NOTES

1. Tactile slabs to be laid parallel to the crossing point on the opposite side of the road.
2. The back edge of the tactile surface should be at right angles to the direction of crossing. Where the back edge is not parallel to the kerb and, as a result, the depth of the tactile surface varies, it should be no less than 800mm at any point.
3. Tactile slabs to be blister surface and coloured buff at uncontrolled crossings.
4. Inspection chamber and manhole covers are not to be within tactile paving.
5. Footway to be reconstructed to accommodate new levels.
6. Tactile slabs to have no less than $\frac{1}{3}$ cuts.
7. For further information, refer to 'Guidance on the Use of Tactile Paving Surfaces'.



Growth, Highways & Infrastructure
Suffolk County Council
Endeavour House
8 Russell Road
Ipswich
Suffolk IP1 2BX

DRAWING TITLE
KERBS, FOOTWAYS, CYCLEWAYS AND PAVED AREAS
TACTILE PAVING
UNCONTROLLED CROSSING POINT

REV.	DESCRIPTION	CHECKED	DATE

INIT.	DATE	PROJECT TITLE	
ORIGINATOR	SH 07/2024	STANDARD CONSTRUCTION DETAILS	
CHECKER	SH 07/2024	SCALE	DATE
DESIGNER	SH 07/2024	N.T.S.	JUL. 2024
REVIEWER	CB 07/2024	DRAWING No. DM-1100-21	